



Pump Model	GHP 50-25	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Anticlock	Suction	DN 300 - PN 64	1st Impeller	N/A
Max No. Stages	12 Stages	Delivery	DN 250 - PN 160	Impeller	50-24
Max Head	1200.0 m	Pumped Medium - Water @		Diffuser	50-21
Max Flowrate	750.0 m ³ /h	Temperature	20 °C	Last Diffuser	50-21
Max Efficiency	80.0%	Viscosity	1 cP	Overflow	50-22
Max Abs Power	179.6 kW Per Stage	Density	998 kg/m ³	Stage Casing	50-42

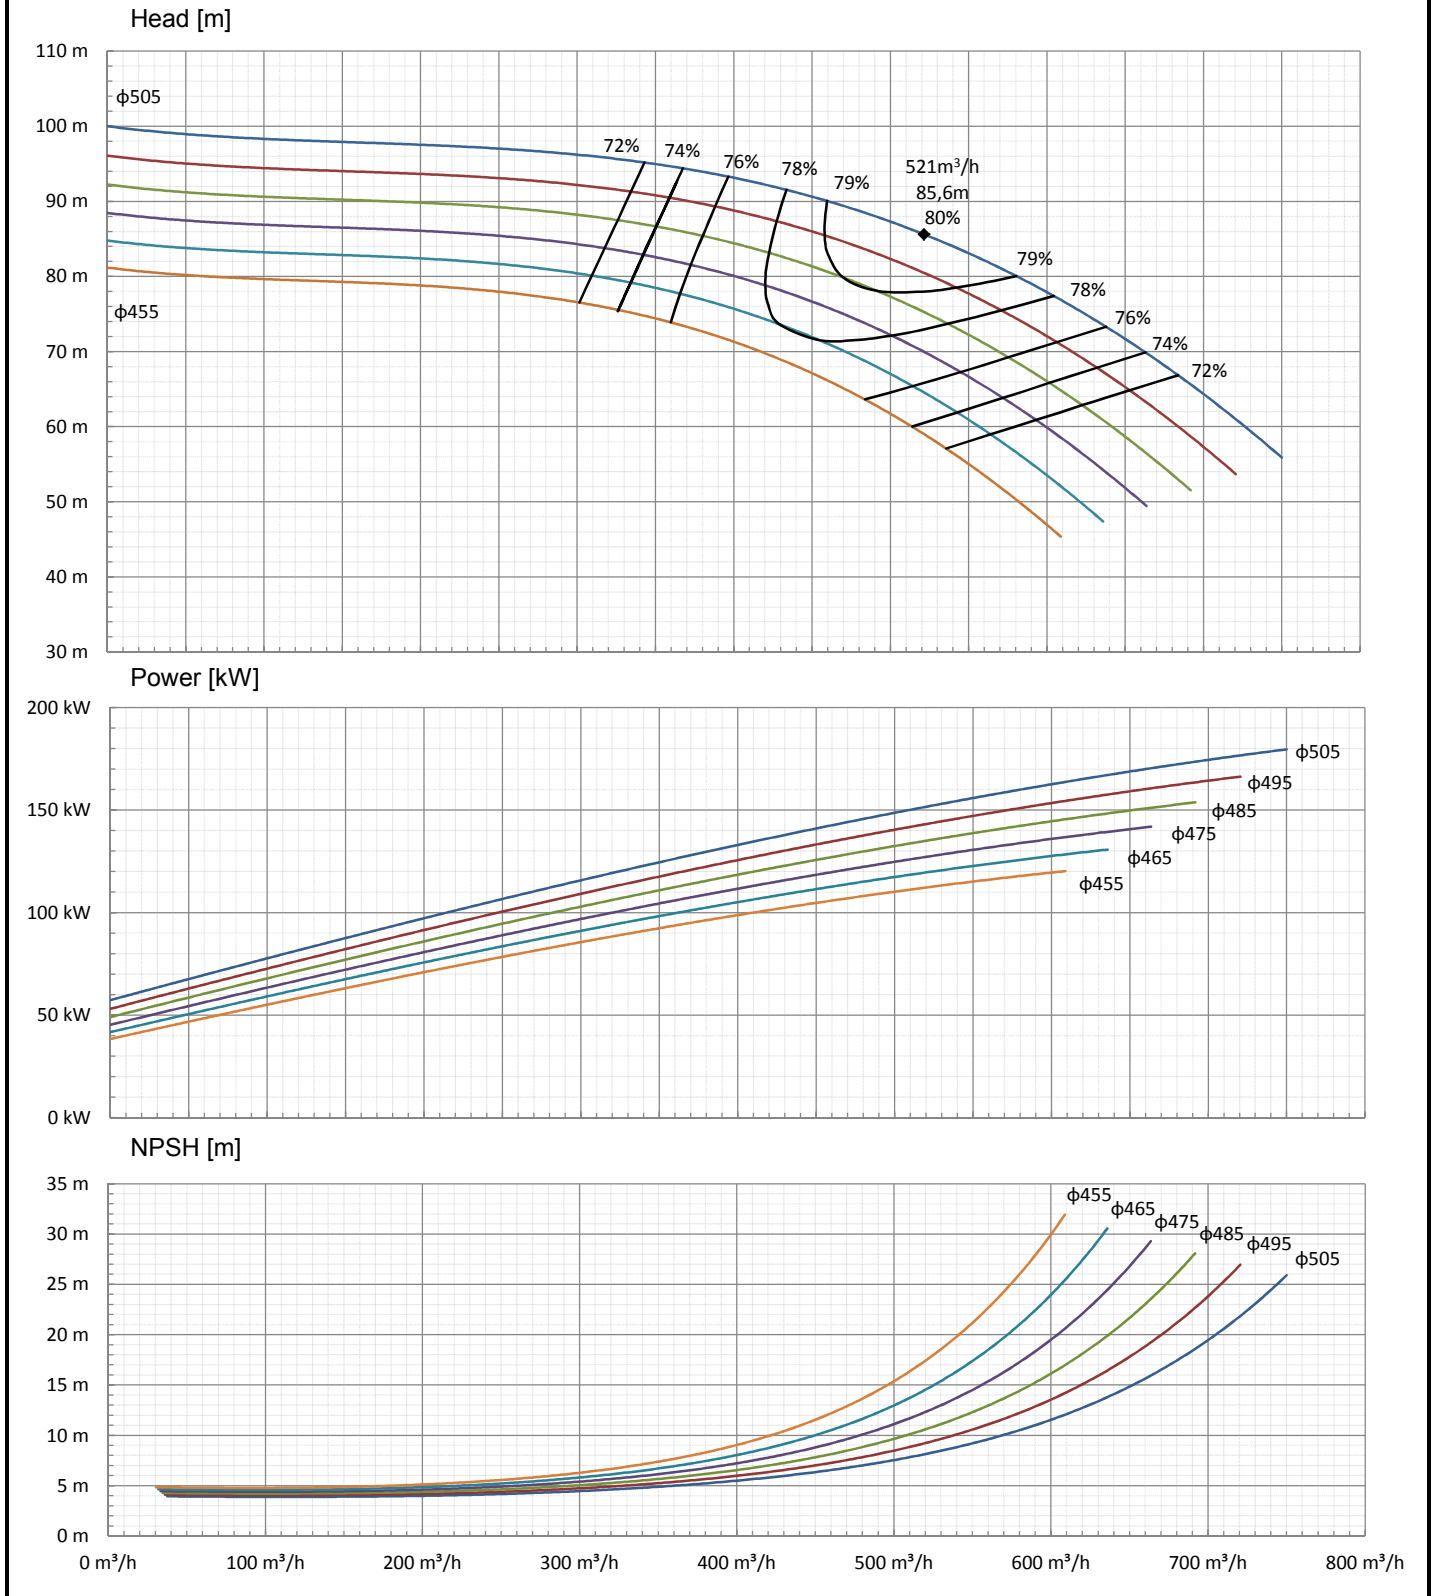

DOCUMENT NUMBER:	SCAG-R-214	ENGINEER:	Craig Adamson
REVISION:	2	PROJECT:	
DATE:	2015-08-24	CUSTOMER:	

Pump Model	GHP 50-25	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 300 - PN 64	1st Impeller	N/A
Max No. Stages	12 Stages	Delivery	DN 250 - PN 160	Impeller	50-24
Max Head	1200.0 m	Pumped Medium - Water @		Diffuser	50-21
Max Flowrate	750.0 m ³ /h	Temperature	20 °C	Last Diffuser	50-21
Max Efficiency	80.0%	Viscosity	1 cP	Overflow	50-22
Max Abs Power	179.6 kW Per Stage	Density	998 kg/m ³	Stage Casing	50-42

Head [m] 2 - 12 Stages

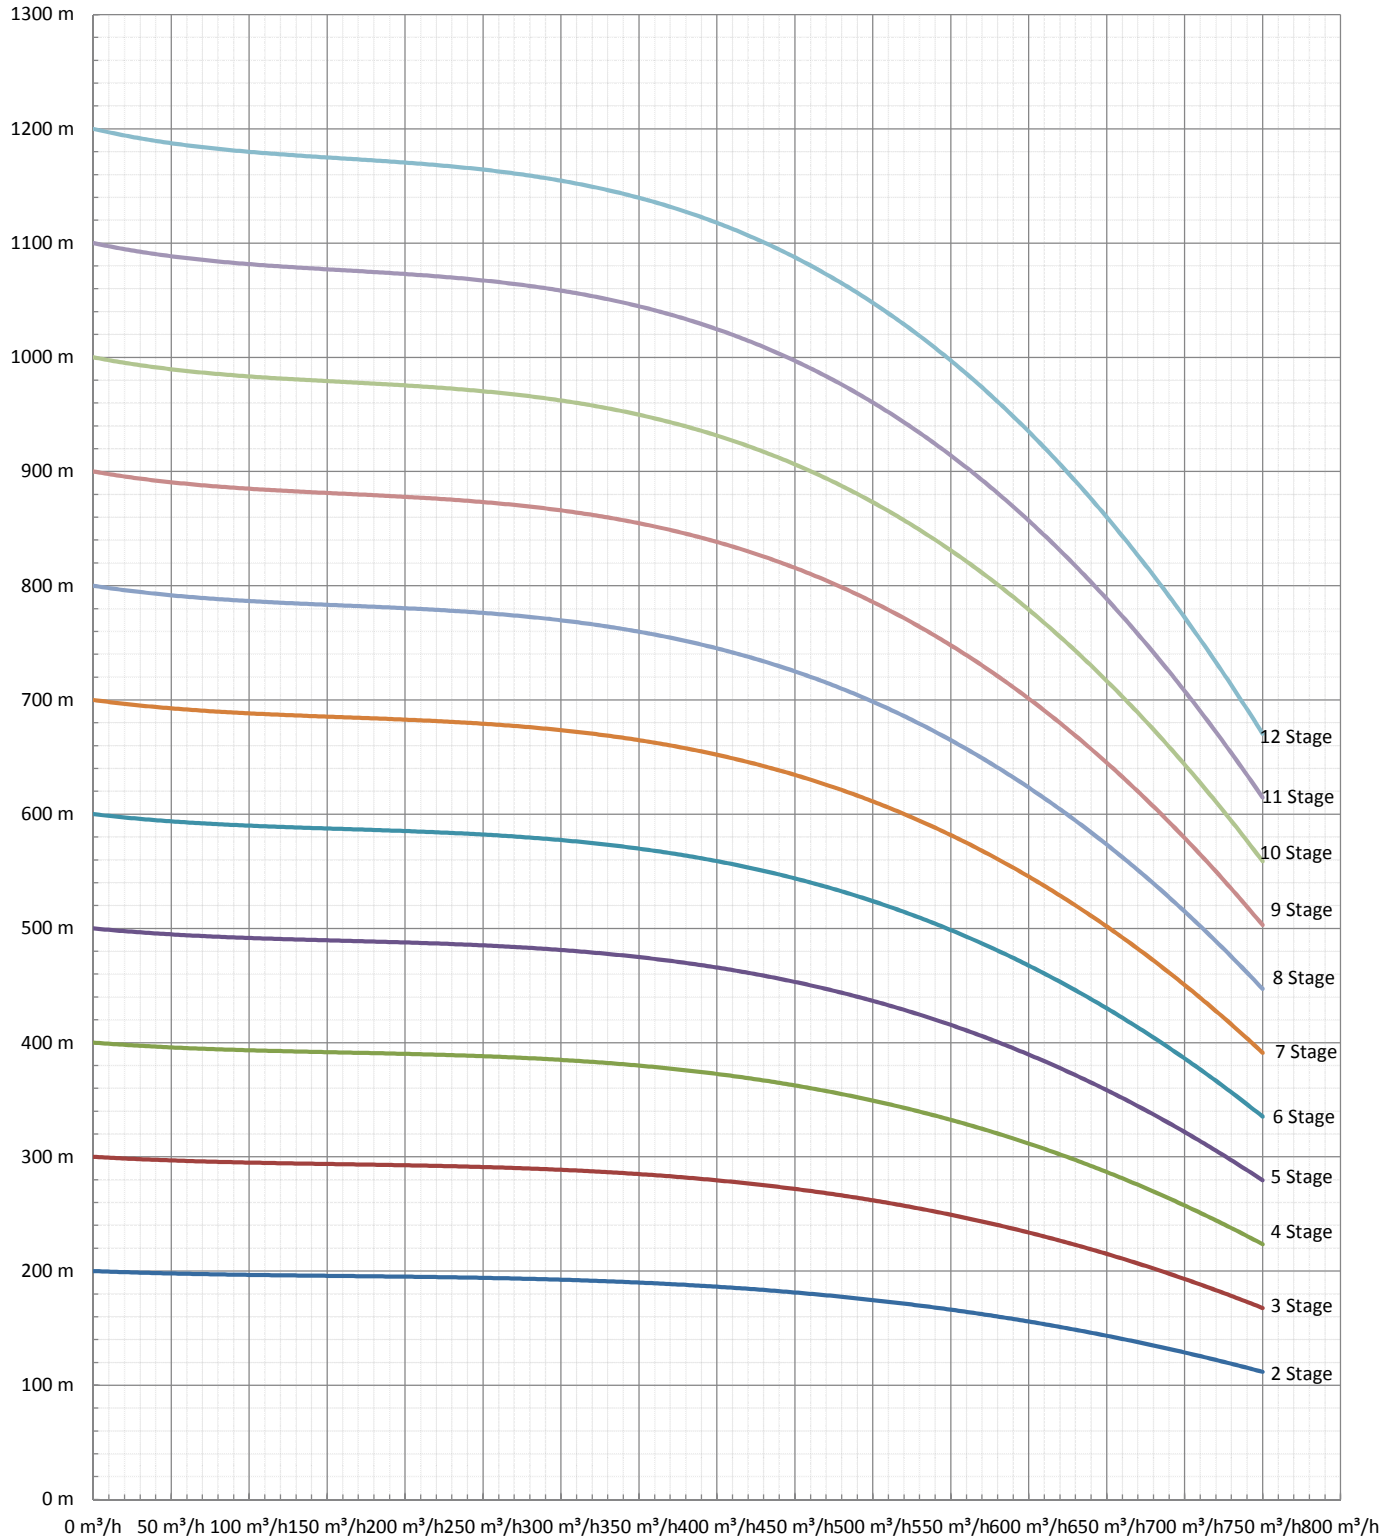

DOCUMENT NUMBER:	SCAG-R-214	ENGINEER:	Craig Adamson
REVISION:	2	PROJECT:	
DATE:	2015-08-24	CUSTOMER:	