



Pump Model	GSB 200	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 250 - PN 64	DE/NDE Impeller	200-22/23
Max No. Stages	14 Stages	Delivery	DN 200 - PN 160	DE/NDE Diffuser	200-09/10
Max Head	1408.1 m	Pumped Medium - Water @		DE/NDE Last Diff	200-07/08
Max Flowrate	750.0 m ³ /h	Temperature	20 °C	Stage Casing	200-04/05
Max Efficiency	79.0%	Viscosity	1 cP	Suction Casing	200-01
Max Abs Power	186.4 kW Per Stage	Density	998 kg/m ³	Discharge Casing	200-03

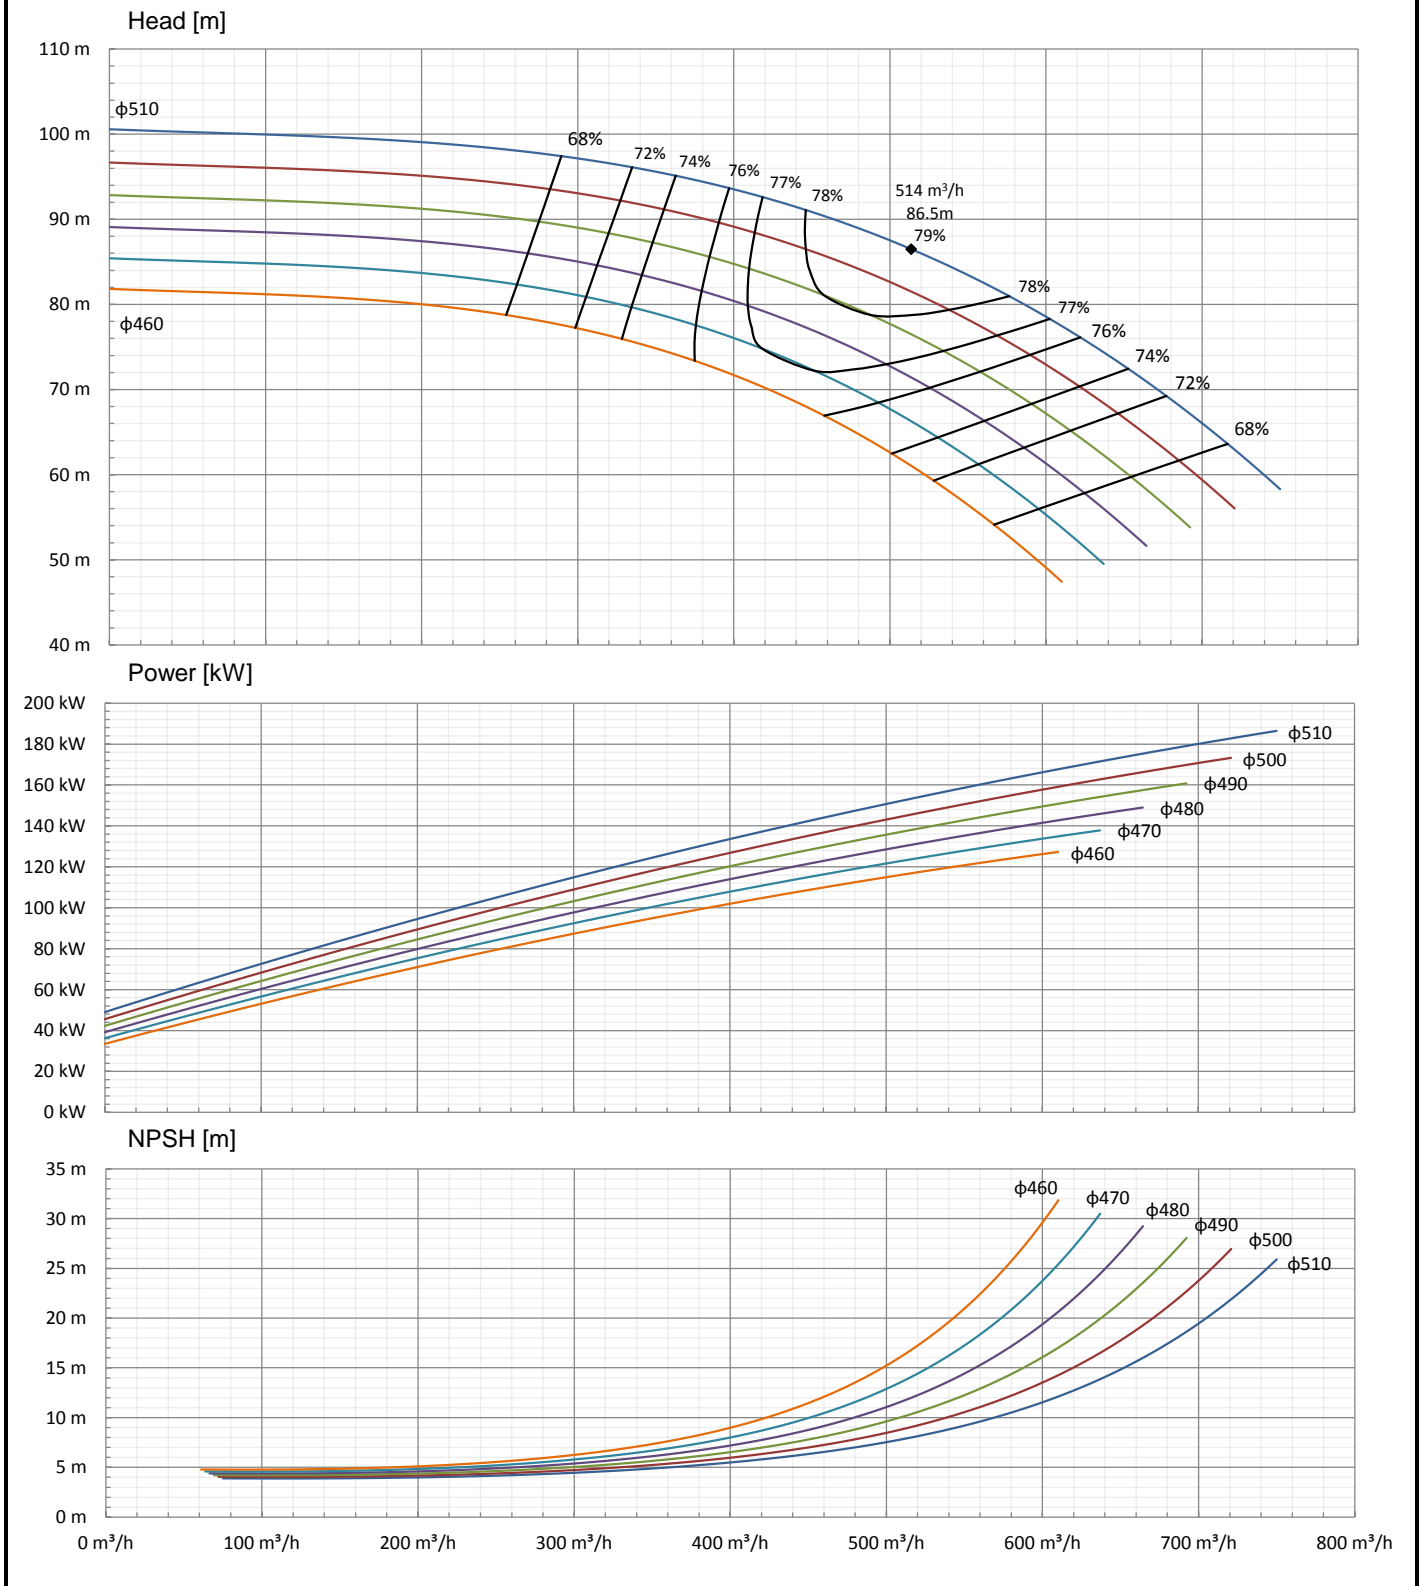

DOCUMENT NUMBER:	SCAG-R-211	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2017/01/16	CUSTOMER:	

Pump Model	GSB 200	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 250 - PN 64	1st Impeller	200-22/23
Max No. Stages	14 Stages	Delivery	DN 200 - PN 160	Impeller	200-09/10
Max Head	1408.1 m	Pumped Medium - Water @		Diffuser	200-07/08
Max Flowrate	750.0 m ³ /h	Temperature	20 °C	Last Diffuser	200-04/05
Max Efficiency	79.0%	Viscosity	1 cP	Overflow	200-01
Max Abs Power	186.4 kW Per Stage	Density	998 kg/m ³	Stage Casing	200-03

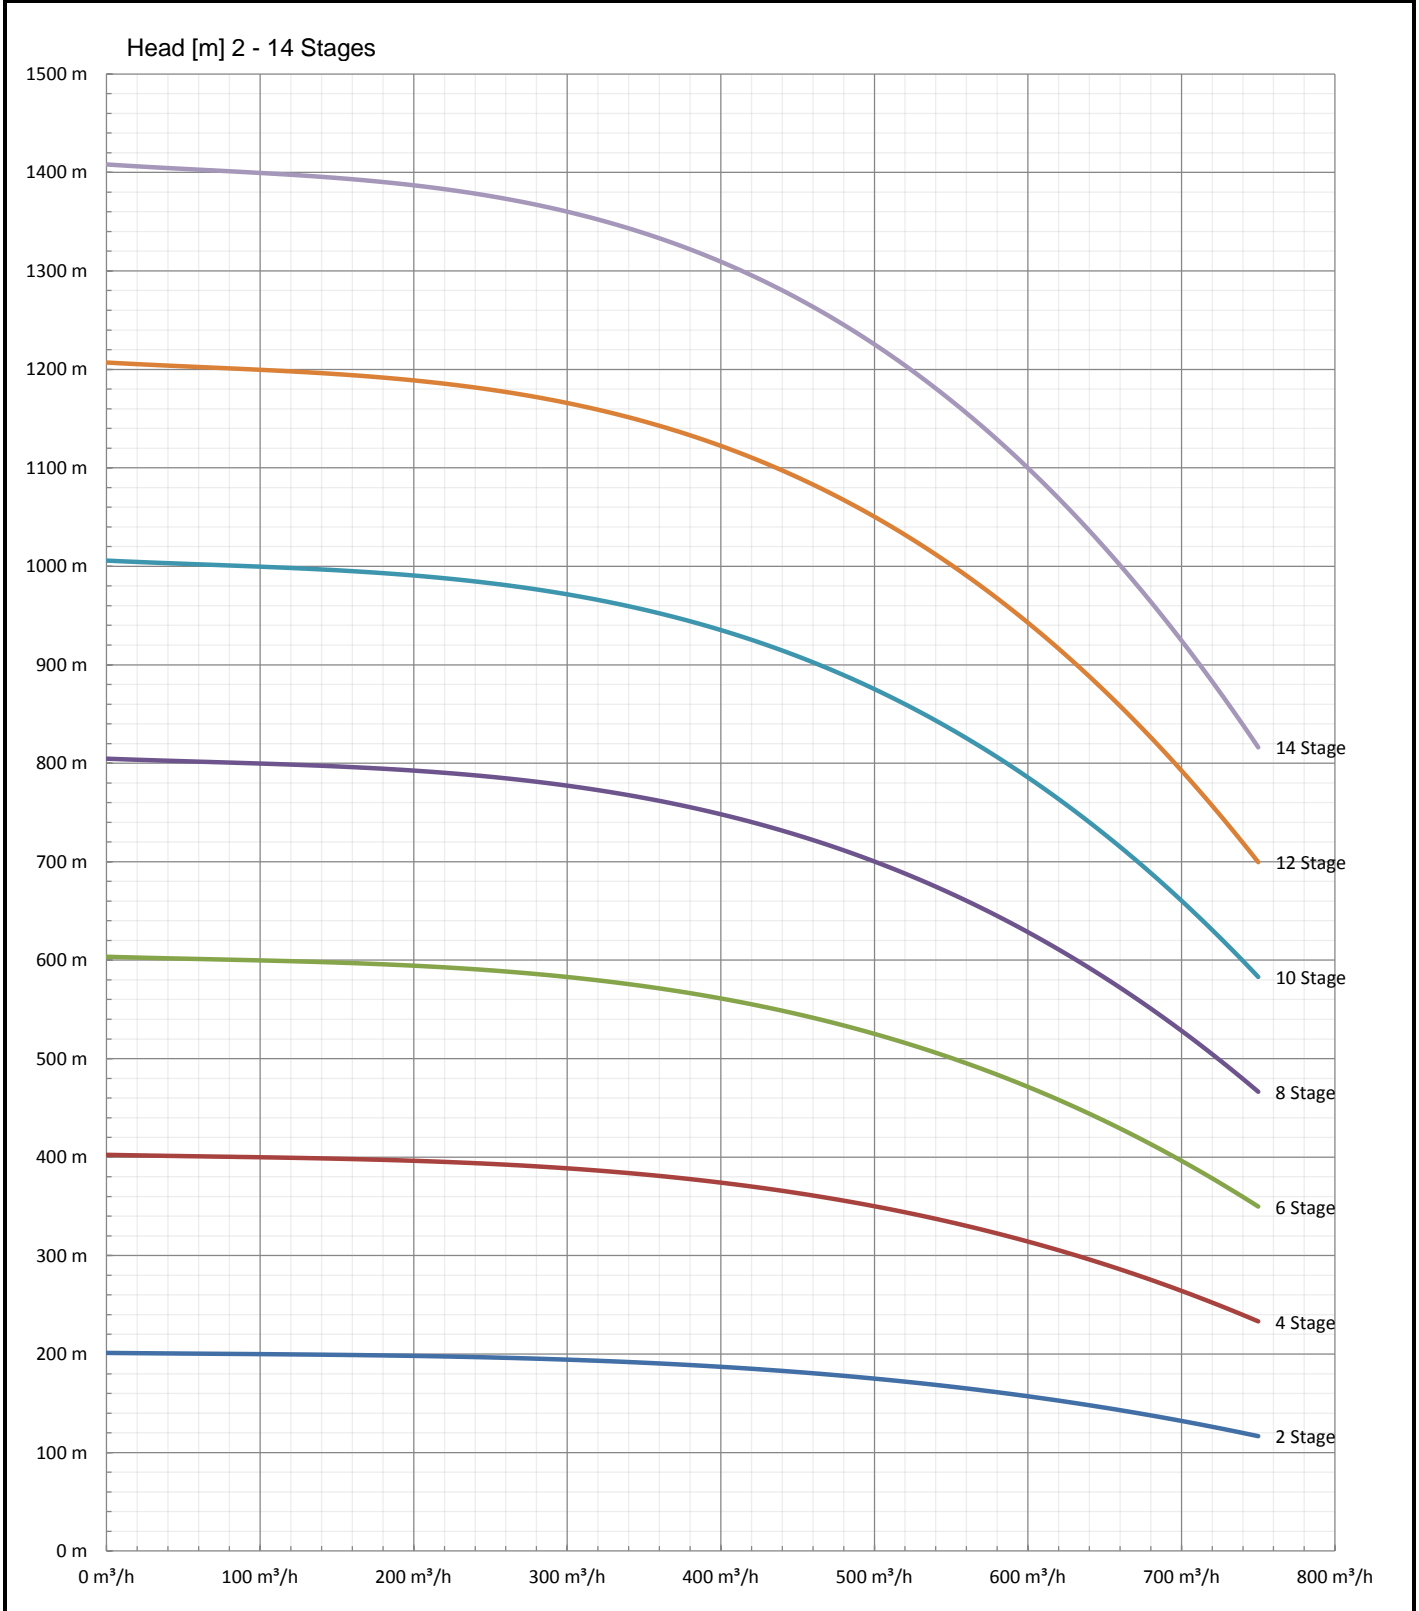

DOCUMENT NUMBER:	SCAG-R-211	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2017/01/16	CUSTOMER:	